

Signals and Noise

- **Noise** limits detectability of every instrumental method
- Present in every instrumental method! Cannot be completely removed.
- Best we can do is understand contributions of noise and try to minimize noise.
 - Enhance Signal
 - Reduce Noise
 - Modify Instrumental Method
- Always trying to maximize the signal to noise ratio.
 - Relates magnitude of noise to magnitude of signal.

Signal to Noise Ratio

- Analytical signal is a combination of three components:
 - chemical information
 - background
 - Noise
 - p-p vs. rms noise




Figure 5-2 Effect of signal-to-noise ratio on the NMR spectrum of progesterone: A, $S/N = 4.3$; B, $S/N = 43$.
(Adapted from R. E. Ernst and W. A. Anderson, Rev. Sci. Instr., 1966, 37, 101. With permission.)

Noise Sources

- **Chemical Noise**
 - Result of chemical or physical properties of the sample.
 - Degradation, photoreactivity, temperature and pressure effects, etc.
 - Minimization requires that you understand your sample!
- **Instrumental Noise**
 - Inherent in electrical devices
 - Four main types
 - thermal noise
 - shot noise
 - flicker noise
 - environmental noise

Instrumental Noise

- **Thermal Noise**
 - Johnson, Resistance
 - Result of random thermal motion of electrons
 - Magnitude of thermal noise based on thermodynamics

$$v_{\text{rms}} = \sqrt{4kTR \Delta f}$$

- Minimize by:

Instrumental Noise

- **Shot Noise**
 - collection of random, quantized events

$$i_{\text{rms}} = \sqrt{2Ie\Delta f}$$

- Minimize by:
- **Flicker Noise**
 - related to signal frequency
 - $v \propto 1/f$
- Minimize by:

Instrumental Noise

- **Environmental Noise**
 - many sources

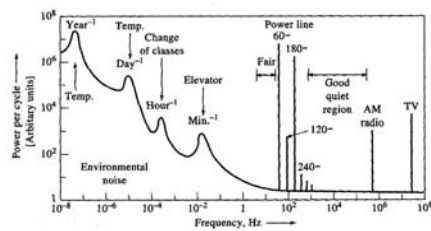


Figure 5-3 Some sources of environmental noise in a university laboratory. Note the frequency dependence and regions where various types of interference occur. (From T. Goo, J. Chem. Educ., 1968, 45, A540. With permission.)

- Minimize by:

Dealing with Noise: Hardware Methods

- Grounding: Be sure that “common” is really common to all circuits
- Shielding: Surround susceptible components with a conducting “shield” that is connected to ground
- Op-Amp circuitry: Difference and Instrumentation amplifiers.
 - Reject “common mode” noise




Figure 3-11 An operational amplifier difference amplifier measuring the output voltage of a pair of thermocouples.

Dealing with Noise: Hardware Methods

- **Filters:** Simple RC circuits. Selection of output voltage and time constant determines action of filter.





FIGURE 2.6 Passive filters: (a) low-pass RC filter, (b) high-pass LC filter, and (c) low-pass LC filter.



- **Modulation:** Deliberately cause signal to occur at a single frequency.
- **Lock-In Amplifiers:** Only “see” one frequency

Dealing with Noise: Software Methods

- Signal averaging
 - collect several data sets (n)
 - add sets together and divide by n




Figure 5-10 Effect of signal averaging. Note that the vertical scale is smaller as the number of scans increases. The signal-to-noise ratio is proportional to \sqrt{n} . Random fluctuations in the noise tend to cancel as the number of scans increases, but the signal accumulates; thus, S/N increases.

- S/N improvement:

$$\text{rms noise} = \sqrt{\frac{\sum_{i=1}^n (S_x - S_i)^2}{n}}$$

$$\frac{S}{N} = \frac{S_x}{\sqrt{\frac{\sum_{i=1}^n (S_x - S_i)^2}{n}}}$$

Dealing with Noise: Software Methods

- Sampling considerations
 - stable signal
 - adequate sampling frequency
- Boxcar Averaging
 - average adjacent data points in a single scan
 - sampling rate must be sufficiently high to minimize distortion in analytical signal


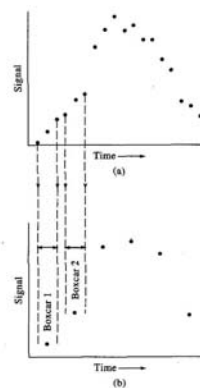


Figure 5-11 Effect of boxcar averaging: (a) original data, (b) data after boxcar averaging. (Reprinted with permission from G. Dulany, Anal. Chem., 1975, 47, 28A. Copyright 1975 American Chemical Society.)

Dealing with Noise: Software Methods

- Digital Filters and Smoothing
 - Fourier Transform: allows discrimination against specific frequencies
 - Time domain signal is converted to frequency domain, filtered, then converted back.

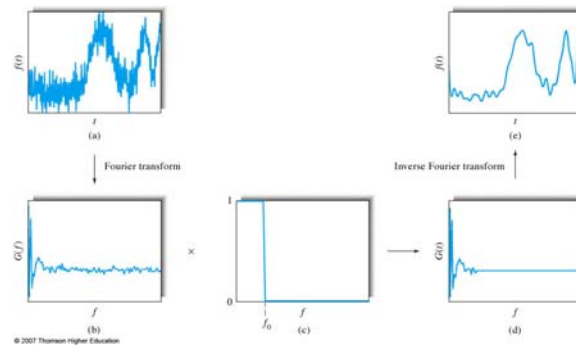

Dealing with Noise: Software Methods

- Smoothing
 - Least-squares polynomial analysis
 - Often suffers from less distortion than boxcar averaging
 - Savitzky-Golay smoothing




Figure 5-15 Effect of smoothing on a noisy absorption spectrum of tartrazine: (A) Raw spectrum, (B) quadratic 5-point smooth of the data in A, (C) fourth-degree 13-point smooth of the same data, (D) tenth-degree 77-point smooth of the data.